arXiv:math/0207044v1 [math.ST] 4 Jul 2002

ON-LINE TRACKING OF A SMOOTH REGRESSION FUNCTION

GOLDENTAYER, L. AND LIPTSER, R.

Abstract. We construct an on-line estimator with equidistant design for tracking a smooth function from Stone-Ibragimov-Khasminskii class. This estimator has the optimal convergence rate of risk to zero in sample size. The procedure for setting coefficients of the estimator is controlled by a single parameter and has a simple numerical solution. The off-line version of this estimator allows to eliminate a boundary layer. Simulation results are given.

1. Introduction.

In this paper, we consider a tracking problem for smooth function $f = f(t)$, $0 \le t \le T$, under observation

$$X_{in} = f(t_{in}) + \sigma\xi_i, \tag{1.1}$$

for $t_{in} = \frac{i}{n}$, $\quad i = 0, \dots, n$ (n is large), where (ξ_i) is a sequence of i.i.d. random variables with $E\xi_i = 0$, $\quad E\xi_i^2 = 1$, and σ^2 is a positive constant. Without additional assumptions on the function f it is difficult to create an estimator even for large n. The filtering approach, see Bar-Shalom and Li [1], proposes an estimator in the form of Kalman filter corresponding to a stochastic model for f, e.g. f is differentiable k times, and k-th derivatives of f is simulated by a white noise with a certain intensity. Since f is deterministic function, the non-trivial part of such approach is a choice of filter parameters and asymptotic analysis of estimation risk in $n \to \infty$. On the other hand, nonparametric statistic approach to the regression estimation of a function f assumes that f belong to some limited class. We take f from the class $\Sigma(\beta, L)$ (introduced by Stone, [10], [11] and Ibragimov and Khasminskii, [3], [4]) of k times continuously differentiable functions with Hölder continuous last derivative (here $f^{(0)} = f$, L and α are the same for any function from the class):

$$\Sigma(\beta, L) = \left\{ f: \begin{array}{l} \text{obeys } k \text{ derivatives}, f^{(0)}, f^{(1)}, \dots, f^{(k)}; \\ |f^{(k)}(t_2) - f^{(k)}(t_1)| \le L|t_2 - t_1|^{\alpha}, \ \forall\, t_1, t_2, \ \alpha \in (0,1]; \\ \beta = k + \alpha \end{array} \right\}.$$

It is known [10], [11], [3], [4] that there are kernel type estimators $\widehat{f_n^{(j)}}(t)$ of $f^{(j)}(t)$, $j = 0, 1, \dots, k$ such that for a wide class of loss functions $\mathcal{L}(*)$ and

---

Date: 16/06/2002.

1991 *Mathematics Subject Classification.* 62G05; Secondary 62M99.

Key words and phrases. On-line tracking estimator, Equidistant design.

This work is partially supported by a fellowship from the Yitzhak and Chaya Weinstein Research Institute for Signal Processing at Tel Aviv University.

$p > 1$ (C is positive constant):

$$\sup_{f\in\Sigma(\beta,L)} E\mathcal{L}\Big(n^{\frac{\beta-j}{2\beta+1}}\|\widehat{f_n^{(j)}}-f^{(j)}\|_{L_p}\Big) < C,\ j=0,1,...,k \tag{1.2}$$

and no estimator provides a better rate of convergence to zero in $n\to\infty$ uniformly in $\Sigma(\beta,L)$. The same rate in n is valid under fixed value t for the estimation risk $E\big(\widehat{f_n^{(j)}}(t)-f^{(j)}(t)\big)^2$, $j=0,1\dots,k$. This rate cannot be exceeded uniformly on any nonempty open set from $(0,T)$. Parallel to kernel type estimators (see, e.g. [4]), [9], [8]), Khasminskii and Liptser [6] proposed an on-line estimator (hereafter for brevity t_{in} is replaced by t_i and $\widehat{f_n^{(j)}}$ by $\widehat{f^{(j)}}$):

$$\begin{aligned}
\widehat{f^{(j)}}(t_i) &= \widehat{f^{(j)}}(t_{i-1}) + \frac{1}{n}\widehat{f^{(j+1)}}(t_{i-1}) + \frac{q_j}{n^{\frac{(2\beta-j)}{2\beta+1}}}\big(X_i-\widehat{f^{(0)}}(t_{i-1})\big)\\
&\quad j=0,1,\dots,k-1\\
\widehat{f^{(k)}}(t_i) &= \widehat{f^{(k)}}(t_{i-1}) + \frac{q_k}{n^{\frac{(2\beta-k)}{2\beta+1}}}\big(X_i-\widehat{f^{(0)}}(t_{i-1})\big),
\end{aligned} \tag{1.3}$$

subject to the initial conditions $\widehat{f^{(0)}}(0),\widehat{f^{(1)}}(0),\dots,\widehat{f^{(k)}}(0)$. The initial conditions are chosen as arbitrary bounded constants independent of n. The parameters $q_0,\dots,q_k$ are specifically chosen. The vector $\mathfrak{q}$ with these entries is called the filter gain.

The rigorous result given in [6] is formulated as:

> *Let filter gain $\mathfrak{q}$ be chosen such that all roots of characteristic polynomial*
>
> $$p^k(u,\mathfrak{q}) = u^{k+1}+q_0u^k+q_1u^{k-1}+\ldots+q_{k-1}u+q_k \tag{1.4}$$
>
> *are different and have negative real parts. Let the observation model defined in (1.1), $f\in\Sigma(\beta,L)$ and $\sigma^2>0$. Then, for the estimator given in (1.3) there exist positive constants $c(\mathfrak{q})$, $C(\mathfrak{q})$ (independent of n) such that for any $t_i\ge c(\mathfrak{q})n^{-\frac{1}{2\beta+1}}\log n$ the normalized in n risk obeys*
>
> $$\overline{\lim}_{n\to\infty}\sup_{f\in\sum(\beta,L)}\sum_{j=0}^{k}E\big(f^{(j)}(t_i)-\widehat{f^{(j)}}(t_i)\big)^2 n^{\frac{2(\beta-j)}{2\beta+1}} \le C(\mathfrak{q}). \tag{1.5}$$
>
> *The rates $n^{-\frac{2(\beta-j)}{2\beta+1}}$, $j=0,1,\dots,k$ cannot be improved. The boundary layer $c(\mathfrak{q})n^{-\frac{1}{2\beta+1}}\log n$, where (1.5) might fail, is inevitable.*

Remark 1. *The left side boundary layer $c(\mathfrak{q})n^{-\frac{1}{2\beta+1}}\log n$ is due to on-line limitations of the above tracking system. One can readily suggest an off-line modification with the same recursion in the backward time subject to some boundary conditions independent of observation X_i's. This modification possesses the right side boundary layer $[T-c(\mathfrak{q})n^{-\frac{1}{2\beta+1}}\log n, T]$ and accuracy (1.5) on $[0,T-c(\mathfrak{q})n^{-\frac{1}{2\beta+1}}\log n]$. So, some combination of the forward and* *backward time tracking algorithms allows (1.5) accuracy on* $[0,T]$. *For instance, a combination of forward time tracking on the interval* $\left[\frac{T}{2},T\right]$ *and backward time tracking on* $\left[0,\frac{T}{2}\right]$ *can be used.*

In this paper, we deal with the estimator given in (1.3) and restrict ourselves by considering f from the class $\Sigma(L,k+1)$, i.e. the class of k-times differentiable functions f with Lipschitz continuous $f^{(k)}(t)$.

A suitable choice of filtering gain $\mathfrak{q}$ should satisfy multiple requirements regarding the cost function $C(\mathfrak{q})$ and parameter $c(\mathfrak{q})$, involved in the description of boundary layer. Moreover, a correct choice of $\mathfrak{q}$ should guarantee that the roots of characteristic polynomial $p^k(u,\mathfrak{q})$ are different and have negative real parts. These requirements might contradict each other. To avoid contradictions, we use the fact that estimator (1.3) has a structure of Kalman filter. We build a Kalman filter according to Bar-Shalom and Li [1], so that $f^{(k)}(t)$ is generated by a white noise with intensity γ. For each γ, we choose the Kalman gain $\mathfrak{q}(\gamma)$ and use it for minimization of $C\big(\mathfrak{q}(\gamma)\big)$ in γ. So, the minimization problem of the cost function is controlled by single parameter and allows to establish a reasonable relationship between $C(\mathfrak{q})$ and $c(\mathfrak{q})$. Moreover, this type of minimization automatically guarantees negative real parts of the roots for characteristic polynomial $p^k(u,\mathfrak{q})$. For $k\le 4$ the roots of $p^k(u,\mathfrak{q})$ are different and numerical verification of the same fact for $k>4$ is available.

2. The filter gain choice

2.1. **Preliminaries.** Henceforth $\beta=k+1$. For notational convenience we describe our problem in matrix notation. Introduce the following matrices:

$$a=\begin{pmatrix}0&1&0&0&\dots&0\\0&0&1&0&\dots&0\\\vdots&\vdots&\vdots&\vdots&\vdots&\vdots\\0&0&0&0&\dots&1\\0&0&0&0&\dots&0\end{pmatrix}_{(k+1)\times(k+1)},$$

$$A=\begin{pmatrix}1&0&\dots&0\end{pmatrix}_{1\times(k+1)},\quad \mathfrak{b}=\begin{pmatrix}0\\\vdots\\0\\1\end{pmatrix}_{(k+1)\times 1}.$$

Notice that by Lemma 3.1 in [2] the roots of $p^k(u,\mathfrak{q})$ and eigenvalues of $(a-\mathfrak{q}A)$ coincide. In accordance with this remark, while eigenvalues of $(a-\mathfrak{q}A)$ have negative real parts we may describe the cost function $C(\mathfrak{q})$ in terms of the bias $\widetilde{M}(\mathfrak{q})$ and variance $P(\mathfrak{q})$ for tracking errors (see, (3.11)) (hereafter * is the transposition symbol):

$$C(\mathfrak{q})=\operatorname{trace}\Big(P(\mathfrak{q})+\widetilde{M}(\mathfrak{q})\widetilde{M}^*(\mathfrak{q})\Big)$$

where $\widetilde{M}(\mathfrak{q})=L(a-\mathfrak{q}A)^{-1}\mathfrak{b}$ and the matrix $P(\mathfrak{q})$ solves the Lyapunov equation $(a-\mathfrak{q}A)P(\mathfrak{q})+P(\mathfrak{q})(a-\mathfrak{q}A)^*+\sigma^2\mathfrak{q}\mathfrak{q}^*=0$. In Section 4, we select the filter gain $\mathfrak{q}(\gamma)$ from one-parameter family

$$\Gamma=\Big\{\gamma\ge\gamma_\varepsilon>0:\mathfrak{q}(\gamma)=\frac{Q(\gamma)A^*}{\sigma^2}\Big\}$$

where $Q(\gamma)$ is a positive definite matrix given by the algebraic Riccati equation $aQ(\gamma)+Q(\gamma)a^*+\gamma^2\mathfrak{b}\mathfrak{b}^*-\frac{Q(\gamma)A^*AQ(\gamma)}{\sigma^2}=0$. Finally we choose

$$\gamma^\circ=\operatorname*{argmin}_{\gamma\in\Gamma}C\big(\mathfrak{q}(\gamma)\big)$$

and the filter gain $\mathfrak{q}(\gamma^\circ)$. A relevant choice of γ_ε allows to have an acceptable value of the constant $c\big(\mathfrak{q}(\gamma^\circ)\big)$.

2.2. **Explicit formulae.** In Section 5, we show that the cost function is expressed as:

$$C(\mathfrak{q})=\sigma^2\bigg(\int_0^\infty\mathfrak{q}^*e^{(a-\mathfrak{q}A)^*t}e^{(a-\mathfrak{q}A)t}\mathfrak{q}dt+\Big(\frac{L}{\sigma}\Big)^2\Big[\Big(\frac{1}{q_k}\Big)^2+\sum_{j=0}^{k-1}\Big(\frac{q_j}{q_k}\Big)^2\Big]\bigg).$$

Furthermore, we give the explicit structure of $\mathfrak{q}(\gamma)$ as a function of the control parameter $(\gamma/\sigma)^{1/(k+1)}$. Namely

$$\begin{aligned}
&q_0(\gamma)=U_{00}\Big(\frac{\gamma}{\sigma}\Big)^{1/k+1}\\
&q_1(\gamma)=U_{01}\Big(\frac{\gamma}{\sigma}\Big)^{2/k+1}\\
&\dots\dots\dots\dots\dots\dots\dots\dots\\
&q_k(\gamma)=U_{0k}\Big(\frac{\gamma}{\sigma}\Big),
\end{aligned}$$

where U_{ij}, $i,j=0,1,\dots,k$ are entries of the matrix U being solution of the algebraic Riccati equation $aU+Ua^*+\mathfrak{b}\mathfrak{b}^*-UA^*AU=0$.

2.3. **Example 1.** Here, we consider the tracking problem for Lipschitz continuous function f. Since $k=0$, we have $a=0$, $A=1$, $\mathfrak{b}=1$, $1-U_{00}^2=0$ and so, $q_0=\frac{\gamma}{\sigma}$. Therefore,

$$C(\mathfrak{q}(\gamma))=\frac{\sigma\gamma}{2}+\frac{L^2\sigma^2}{\gamma^2}.$$

With $\gamma_\varepsilon<(2L)^{2/3}\sigma^{1/3}$, we have $\gamma^\circ=(2L)^{2/3}\sigma^{1/3}$ and $\mathfrak{q}(\gamma^\circ)=\Big(\frac{2L}{\sigma}\Big)^{2/3}$. The following estimator is constructed (here $\widehat{f}(t_i):=\widehat{f^{(0)}}_n(t_i)$)

$$\widehat{f}(t_i)=\widehat{f}(t_{i-1})+\Big(\frac{2L}{n\sigma}\Big)^{2/3}(X_i-\widehat{f}(t_{i-1})).$$

Remark 2. *Notice that the direct minimization of* $C(\mathfrak{q})=P(\mathfrak{q})+\widetilde{M}^2(\mathfrak{q})$ *with respect to* q_0 *provides the optimal* $q_0=q(\gamma^\circ)$. *For* $k\ge1$, *this coincidence is not guaranteed. Under the direct minimization of the cost function* $C(\mathfrak{q})$ *with respect to* $\mathfrak{q}$ *the eigenvalues of* $(a-\mathfrak{q}^*A)$ *might have nonnegative real parts.*

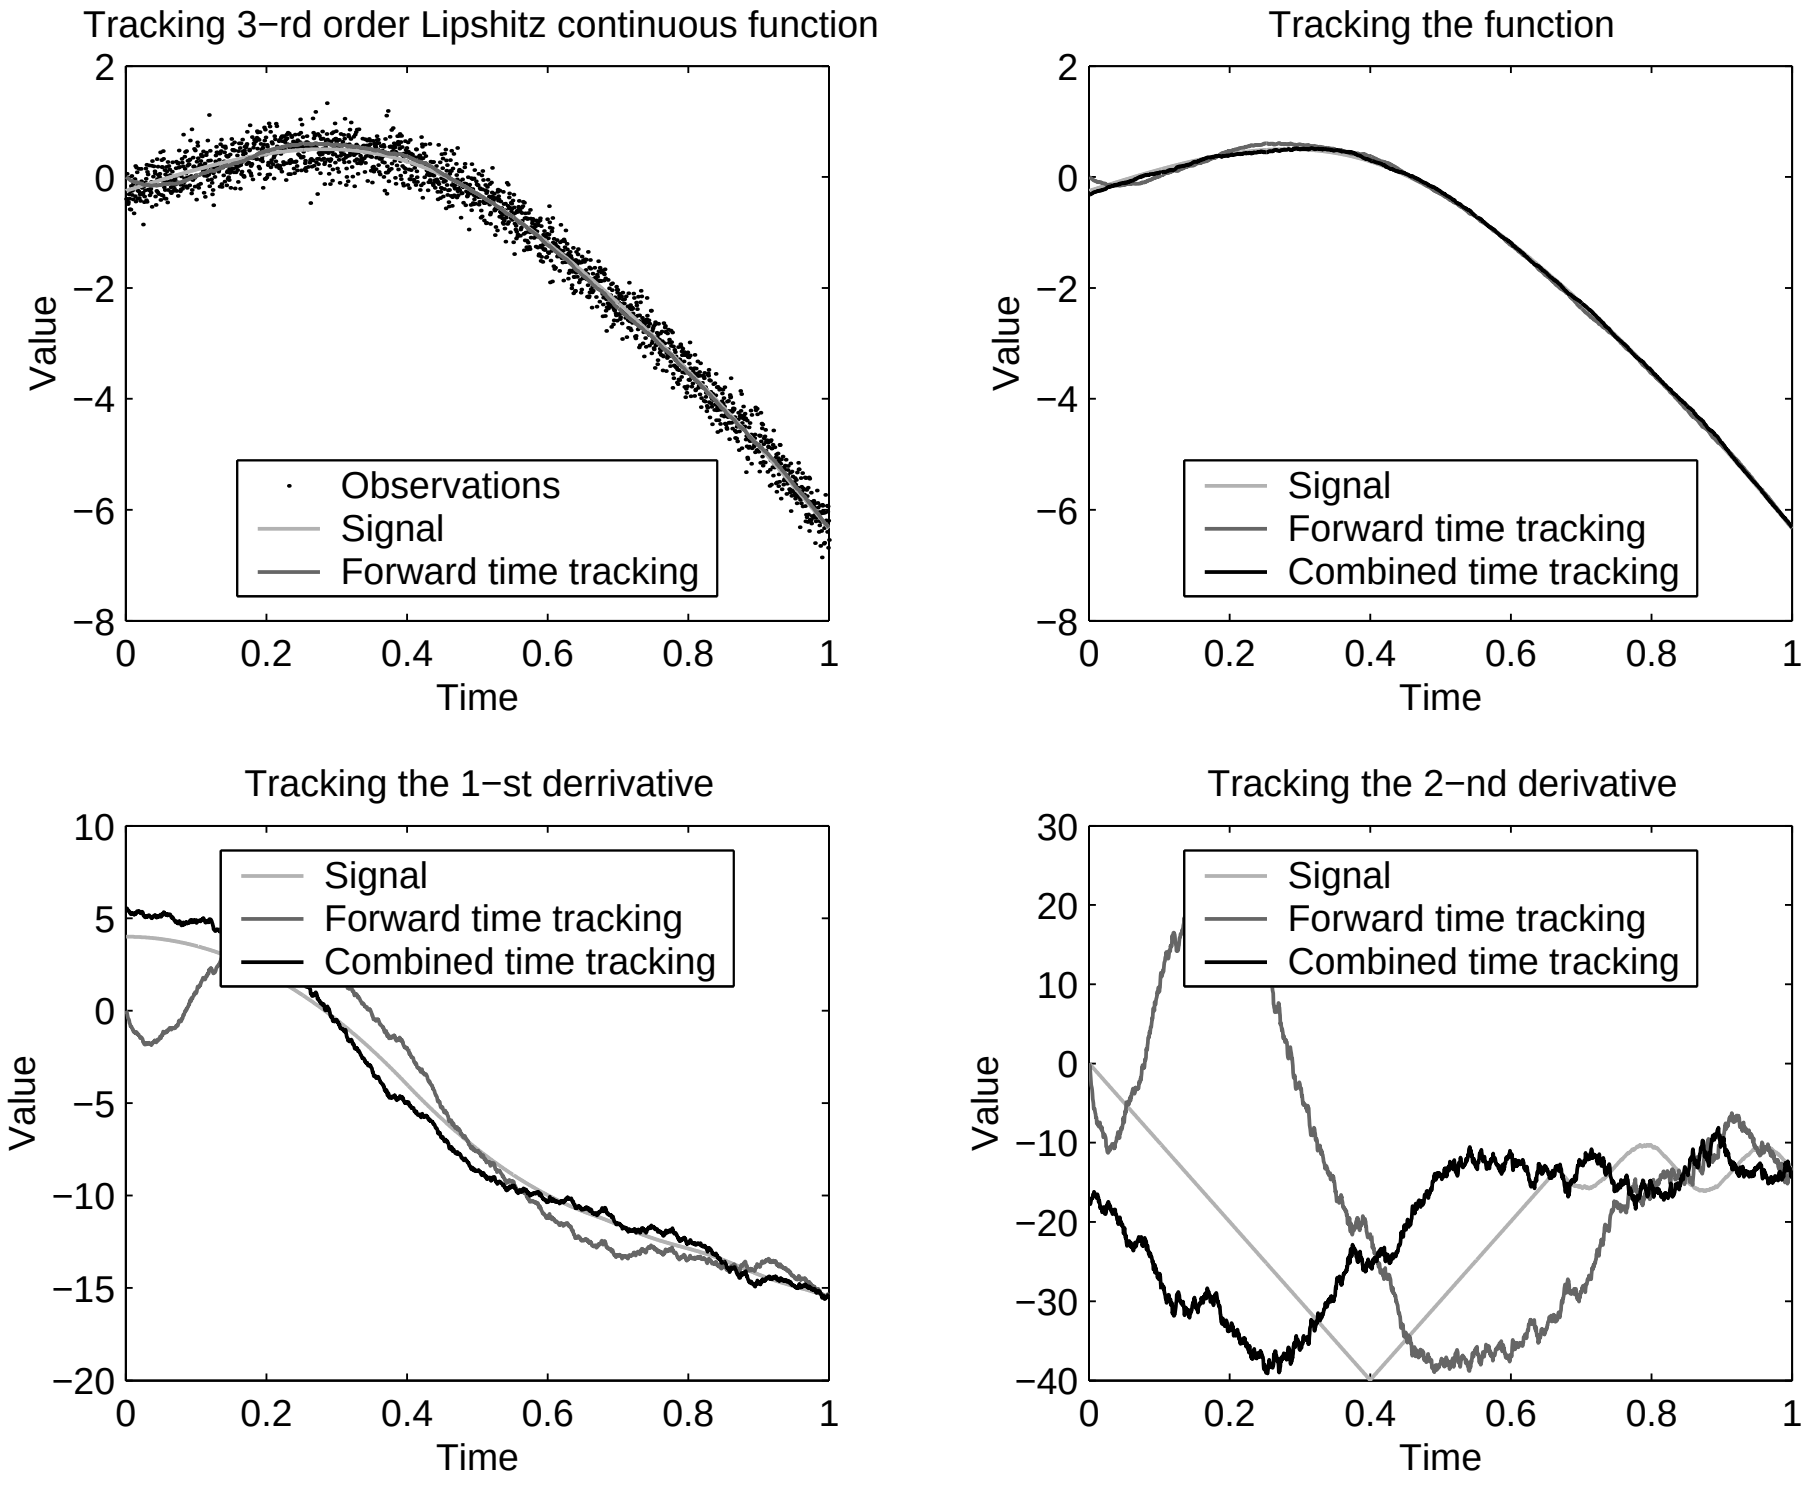

Figure 1. Forward and backward time tracking with $n = 2000$

2.4. **Example 2.** Let us consider a numerical solution for $k = 2$, i.e. f is twice differentiable function. Its second derivative is Lipschitz continuous with constant $L = 100$. For $\sigma = 0.25$, we find (see Figure 2) $\gamma^\circ = 24.533$ and $\gamma^\circ/\sigma = 98.132$. According to Table 1, $U_{00} = 2$, $U_{01} = 2$, $U_{02} = 1$. Hence $q_0 = 9.225$, $q_1 = 42.550$, and $q_2 = 98.132$. So, the following estimator is constructed

$$\begin{aligned}
\widehat{f^{(0)}}(t_i) &= \widehat{f^{(0)}}(t_{i-1}) + \frac{1}{n}\widehat{f^{(1)}}(t_{i-1}) + \frac{9.225}{n^{6/7}}\big(X_i - \widehat{f^{(0)}}(t_{i-1})\big)\\
\widehat{f^{(1)}}(t_i) &= \widehat{f^{(1)}}(t_{i-1}) + \frac{1}{n}\widehat{f^{(2)}}(t_{i-1}) + \frac{42.550}{n^{5/7}}\big(X_i - \widehat{f^{(0)}}(t_{i-1})\big)\\
\widehat{f^{(2)}}(t_i) &= \widehat{f^{(2)}}(t_{i-1}) + \frac{98.132}{n^{4/7}}\big(X_i - \widehat{f^{(0)}}(t_{i-1})\big).
\end{aligned}$$

The combination of forward and backward tracking practically allows to eliminate the boundary layer (see Figure 1).

3. Error analysis

In this section, we present a vector of normalized tracking errors and derive the expression for $C(\mathfrak{q})$.

3.1. **Notation.** For notational convenience, set

$$F(t_i)=\begin{pmatrix} f^{(0)}(t_i)\\ f^{(1)}(t_i)\\ \vdots\\ f^{(k)}(t_i)\end{pmatrix},\ \widehat{F}^n(t_i)=\begin{pmatrix} \widehat{f^{(0)}_n}(t_i)\\ \widehat{f^{(1)}_n}(t_i)\\ \vdots\\ \widehat{f^{(k)}_n}(t_i)\end{pmatrix}$$

and introduce a diagonal matrix C_n and vector $\mathfrak{q}_n$:

$$C_n=\mathsf{diag}\big(n^{\frac{\beta}{2\beta+1}},n^{\frac{\beta-1}{2\beta+1}},\dots,n^{\frac{\beta-k}{2\beta+1}}\big)\quad\text{and}\quad \mathfrak{q}_{\mathfrak{n}}=\begin{pmatrix} q_0n^{-\frac{2\beta}{2\beta+1}}\\ q_1n^{-\frac{2\beta-1}{2\beta+1}}\\ \vdots\\ q_kn^{-\frac{2\beta-k}{2\beta+1}}\end{pmatrix}.$$

We use a vector-matrix form of estimator (1.3)

$$\widehat{F}^n(t_i)=\widehat{F}^n(t_{i-1})+\frac{1}{n}a\widehat{F}^n(t_{i-1})+\mathfrak{q}_n\big(X_i-A\widehat{F}(t_{i-1})\big)\tag{3.1}$$

and obvious identity

$$F(t_i)\equiv F(t_{i-1})+\frac{1}{n}aF(t_{i-1})+\mathfrak{b}\big(f^{(k)}(t_i)-f^{(k)}(t_{i-1})\big).\tag{3.2}$$

3.2. **Normalized errors.** Denote $\delta_i=\widehat{F}(t_i)-F(t_i)$ and introduce normalized error $\Delta_i=C_n\delta_i$. Recursions (3.1) and (3.2) provide

$$\begin{aligned}\delta_i\ &=\ \delta_{i-1}+\frac{1}{n}a\delta_{i-1}+\mathfrak{q}_n\sigma\xi_i-\mathfrak{q}_nA\delta_{i-1}+\big(f(t_i)-f(t_{i-1})\big)\mathfrak{q}_n\\ &\qquad -\mathfrak{b}\big(f^{(k)}(t_i)-f^{(k)}(t_{i-1})\big).\end{aligned}$$

Multiplying both sides of this equation from the left by C_n we find

$$\begin{aligned}\Delta_i\ &=\ \Delta_{i-1}+\frac{1}{n}C_na\delta_{i-1}+C_n\mathfrak{q}_n\sigma\xi_i-C_n\mathfrak{q}_nA\delta_{i-1}\\ &\qquad +\big(f(t_i)-f(t_{i-1})\big)C_n\mathfrak{q}_n-C_n\mathfrak{b}\big(f^{(k)}(t_i)-f^{(k)}(t_{i-1})\big).\end{aligned}\tag{3.3}$$

A special structure (see [6]) of the objects involved in (3.3)

$$\begin{aligned}&C_na=n^{\frac{1}{2\beta+1}}aC_n\\ &C_n\mathfrak{q}_n=n^{-\frac{\beta}{2\beta+1}}\mathfrak{q}\\ &\frac{1}{n}C_na\delta_{i-1}=n^{-\frac{2\beta}{2\beta+1}}a\Delta_{i-1}\\ &C_n\mathfrak{q}_nA\delta_{i-1}=n^{-\frac{2\beta}{2\beta+1}}\mathfrak{q}A\Delta_{i-1}\\ &C_n\mathfrak{b}=n^{\frac{1}{2\beta+1}}\mathfrak{b}\end{aligned}$$

allows to simplify (3.3) significantly:

$$\begin{aligned}\Delta_i\ &=\ \Delta_{i-1}+n^{-\frac{2\beta}{2\beta+1}}\big(a-\mathfrak{q}A\big)\Delta_{i-1}+n^{-\frac{\beta}{2\beta+1}}\mathfrak{q}\sigma\xi_i\\ &+\ n^{-\frac{1}{2\beta+1}}\mathfrak{q}\big(f(t_i)-f(t_{i-1})\big)-n^{\frac{1}{2\beta+1}}\mathfrak{b}\big(f^{(k)}(t_i)-f^{(k)}(t_{i-1})\big).\end{aligned}$$

With $D_n = I + n^{-\frac{2\beta}{2\beta+1}}\big(a - \mathfrak{q}A\big)$ we rewrite the recursion for Δ_i's to

$$\begin{aligned}\Delta_i &= D_n\Delta_{i-1} + n^{-\frac{\beta}{2\beta+1}}\mathfrak{q}\sigma\xi_i \\ &+ n^{-\frac{1}{2\beta+1}}\mathfrak{q}\big(f(t_i) - f(t_{i-1})\big) - n^{\frac{1}{2\beta+1}}\mathfrak{b}\big(f^{(k)}(t_i) - f^{(k)}(t_{i-1})\big). \quad (3.4)\end{aligned}$$

In Proposition 4.1 in [6], it is shown that for n large enough the magnitudes of all eigenvalues of D_n are strictly less than 1. We shall use this property for asymptotic analysis and continuous time approximation.

3.3. **Normalized bias and variance.** Denote the bias and variance of the normalized error Δ_i:

$$M_i^n = E\Delta_i \text{ and } P_i^n = E(\Delta_i - M_i^n)(\Delta_i - M_i^n)^*.$$

Taking the expectation from both side of (3.4) we find

$$\begin{aligned}M_i^n &= D_n M_{i-1}^n \quad (3.5)\\ &+ n^{-\frac{1}{2\beta+1}}\mathfrak{q}\big(f(t_i) - f(t_{i-1})\big) - n^{\frac{1}{2\beta+1}}\mathfrak{b}\big(f^{(k)}(t_i) - f^{(k)}(t_{i-1})\big).\end{aligned}$$

From (3.4) and (3.5), we get $(\Delta_i - M_i^n) = D_n(\Delta_{i-1} - M_{i-1}^n) + n^{-\frac{\beta}{2\beta+1}}\mathfrak{q}\sigma\xi_i$, so that $P_i^n = E(\Delta_i - M_i^n)(\Delta_i - M_i^n)^*$ is defined by the recursion

$$P_i^n = D_n P_{i-1}^n D_n^* + n^{-\frac{2\beta}{2\beta+1}}\sigma^2\mathfrak{q}\mathfrak{q}^*.$$

Since $|f^{(k)}(t_i) - f^{(k)}(t_{i-1})| \le \frac{L}{n}$, it is natural to choose f with

$$f^{(k)}(t_i) - f^{(k)}(t_{i-1}) \equiv \frac{L}{n} \text{ or } -\frac{L}{n}$$

and substitute $\sup_{f\in\sum(\beta,L)} M_i^n\big(M_i^n\big)^*$ by $\widetilde{M_i^n}\big(\widetilde{M_i^n}\big)^*$. Henceforth, $\widetilde{M_i^n}$ is defined by recursion (3.5) with such f, i.e.

$$\widetilde{M_i^n} = \widetilde{M_{i-1}^n} + n^{-\frac{2\beta}{2\beta+1}}\big(a - \mathfrak{q}A\big)\widetilde{M_{i-1}^n} + n^{-\frac{2\beta}{2\beta+1}}\varrho^n - n^{-\frac{2\beta}{2\beta+1}}L\mathfrak{b},$$

where $\varrho^n = \frac{L\mathfrak{q}}{(k+1)!n^k}$. Thus, trace $\big(P_i^n + \widetilde{M_i^n}\big(\widetilde{M_i^n}\big)^*\big)$ determines the normalized mean square tracking error

$$C(\mathfrak{q}) = \overline{\lim}_{n\to\infty}\,\text{trace}\Big(P_i^n + \widetilde{M_i^n}\big(\widetilde{M_i^n}\big)^*\Big), \ t_i \ge c(\mathfrak{q})n^{-\frac{1}{2\beta+1}}\log n. \quad (3.6)$$

3.4. **Continuous time approximation.** To find "$\overline{\lim}_{n\to\infty}$" in (3.6), we give a continuous time approximation of $(\widetilde{M_i^n}, P_i^n)$. To this end, let us introduce the time stretching

$$(t_i - t_{i-1}) = n^{-1} \ \Rightarrow \ (s_i - s_{i-1}) = n^{-\frac{2\beta}{2\beta+1}},$$

with $t_0 = s_0 = 0$. The boundary layer $[0, c(\mathfrak{q})n^{-\frac{1}{2\beta+1}}\log n]$ is transformed to $[0, c(\mathfrak{q})\log n]$ and the interval $[0,T]$ to $[0, Tn^{\frac{1}{2\beta+1}}]$. Let us define $\widetilde{M_{s_i}^n} = \widetilde{M_i^n}$ and $P_{s_i}^n = P_i^n$, $i = 0, 1, \dots$, and for $s \in [s_{i-1}, s_i)$

$$\begin{aligned}\widetilde{M_s^n} &= \widetilde{M_{s_{i-1}}^n} + \int_{s_{i-1}}^{s}\Big((a - \mathfrak{q}A)\widetilde{M_{s_{i-1}}^n}\Big)ds' + (\varrho^n - \mathfrak{b}L)(s - s_{i-1}) \\ P_s^n &= P_{s_{i-1}}^n + \int_{s_{i-1}}^{s}\Big((a - \mathfrak{q}A)P_{s_{i-1}}^n + P_{s_{i-1}}^n(a - \mathfrak{q}A)^* \\ &\qquad + n^{-\frac{\beta}{2\beta+1}}(a - \mathfrak{q}A)P_{s_{i-1}}^n(a - \mathfrak{q}A)^* + \sigma^2\mathfrak{q}\mathfrak{q}^*\Big)ds'. \quad (3.7)\end{aligned}$$

We shall consider these recursions for s_i from $\big(c(\mathfrak{q})\log n,\ n^{\frac{1}{2\beta+1}}T\big]$, where $(\widetilde{M}^n_s, P^n_s)$ have entries bounded in n (see, [6]). Taking into account that recursions (3.7) are homogeneous in s, let us replace $\{s$ and $s_i\}$ by $\{u = s - c(\mathfrak{q})\log n$ and $u_i = s_i - c(\mathfrak{q})\log n\}$. Then, the entries of $(\widetilde{M}^n_u, P^n_u)$ are bounded in n for $0 \le u \le n^{\frac{1}{2\beta+1}}T - c(\mathfrak{q})\log n$. Therefore without loss of generality we may consider (3.7) with initial conditions bounded in n:

$$C(\mathfrak{q}) = \lim_{u\to\infty} \overline{\lim}_{n\to\infty} \operatorname{trace}\Big(P^n_u + \widetilde{M}^n_u\big(\widetilde{M}^n_u\big)^*\Big). \tag{3.8}$$

To determine the right hand side of (3.8), we apply the Arzela-Ascoli theorem. For any $T > 0$, the functions $(\widetilde{M}^n_u, P^n_u)_{0\le u\le T}$ are uniformly bounded and equicontinuous. So, by the Arzela-Ascoli theorem, any converging subsequence $(\widetilde{M}^{n'}_u, P^{n'}_u)$ obeys the limit $(\widetilde{M}'_u, P'_u)$ in the local uniform topology:

$$\lim_{n'\to\infty}\sum_{N=1}^{\infty}\frac{1}{2^N}\min\Big(1, \sup_{0\le u\le N}\big(\|\widetilde{M}^{n'}_u - \widetilde{M}'_u\| + \|P^{n'}_u - P'_u\|\big)\Big) = 0,$$

where

$$\begin{aligned}\widetilde{M}'_u &= \widetilde{M}'_0 + \int_0^u \Big(\big(a - \mathfrak{q}A\big)\widetilde{M}'_v + \mathfrak{b}L\Big)dv\\ P'_u &= P'_0 + \int_0^u \Big(\big(a - \mathfrak{q}A\big)P'_v + P'_v\big(a - \mathfrak{q}A\big)^* + \sigma^2\mathfrak{q}\mathfrak{q}^*\Big)dv.\end{aligned}$$

Since the eigenvalues of $a - \mathfrak{q}A$ have negative real parts, the limits $\widetilde{M}(\mathfrak{q}) := \lim_{u\to\infty}\widetilde{M}'_u$ and $P(\mathfrak{q}) := \lim_{u\to\infty} P'_u$ exist and are defined as:

$$\widetilde{M}(\mathfrak{q}) = -L\big(a - \mathfrak{q}A\big)^{-1}\mathfrak{b} \tag{3.9}$$

$$\big(a - \mathfrak{q}A\big)P(\mathfrak{q}) + P(\mathfrak{q})\big(a - \mathfrak{q}A\big)^* + \sigma^2\mathfrak{q}\mathfrak{q}^* = 0, \tag{3.10}$$

that is $\widetilde{M}(\mathfrak{q})$ and $P(\mathfrak{q})$ are independent of $\{n'\}$ and so

$$C(\mathfrak{q}) = \operatorname{trace}\big(P(\mathfrak{q}) + \widetilde{M}(\mathfrak{q})\widetilde{M}^*(\mathfrak{q})\big). \tag{3.11}$$

4. MINIMIZATION OF THE COST FUNCTION IN ONE PARAMETER CLASS

4.1. **Motivation.** For large values of k a direct minimization of $C(\mathfrak{q})$ from (3.11) would be a difficult problem. Moreover,

$$\mathfrak{q}^\circ = \operatorname*{argmin}_{\mathfrak{q}} C(\mathfrak{q})$$

could not a priori guarantee negative real parts of eigenvalues for $(a - \mathfrak{q}^\circ A)$. To avoid implementation of a conditional minimization procedure, we propose to choose $\mathfrak{q}$ from some limited class given below.

4.2. **Adaptation to Kalman filter design.** Our estimator has a structure of Kalman filter in the discrete time. We assume that $F(0)$ is a random vector, $\widehat{F}^n(0) = EF(0)$, and $f^{(k)}(t_i)$ is generated by stochastic recursion

$$f^{(k)}(t_i) = f^{(k)}(t_{i-1}) + n^{-\frac{\beta+1}{2\beta+1}}\gamma\eta_i, \tag{4.1}$$

where (η_i) is a white noise, independent of (ξ_i), with $E\eta_1 = 0$, $E\eta_1 = 1$ and γ is an arbitrary nonzero parameter. For the observation model

$$X_i = f^{(0)}(t_{i-1}) + \sigma\xi_i$$

we apply the estimator given in (3.1). The resulting errors $\delta_i = \widehat{F}(t_i) - F(t_i)$, $i = 1, \dots$, are defined by a recursion

$$\delta_i = \delta_{i-1} + \frac{1}{n} a\delta_{i-1} + \mathfrak{q}_n \sigma \xi_i - \mathfrak{q}_n A \delta_{i-1} - n^{-\frac{\beta+1}{2\beta+1}} \mathfrak{b}\gamma\eta_i.$$

Then, for $\Delta_i = C_n \delta_i$, $i \geq 1$ we obtain

$$\Delta_i = \Delta_{i-1} + n^{-\frac{2\beta}{2\beta+1}} \big(a - \mathfrak{q}A\big)\Delta_{i-1} + n^{-\frac{\beta}{2\beta+1}} \mathfrak{q}\sigma\xi_i - n^{-\frac{\beta}{2\beta+1}} \mathfrak{b}\gamma\eta_i \tag{4.2}$$

and supply $\Delta_0 = \delta_0$. Denote $Q_i^n = E\Delta_i\Delta_i^*$. From (4.2) it follows

$$\begin{aligned} Q_i^n &= \Big(I + n^{-\frac{2\beta}{2\beta+1}} \big(a - \mathfrak{q}A\big)\Big) Q_{i-1}^n \Big(I + n^{-\frac{2\beta}{2\beta+1}} \big(a - \mathfrak{q}A\big)\Big)^* \\ &\quad + n^{-\frac{2\beta}{2\beta+1}} \sigma^2 \mathfrak{q}\mathfrak{q}^* + n^{-\frac{2\beta}{2\beta+1}} \gamma^2 \mathfrak{b}\mathfrak{b}^* \\ &= D_n Q_{i-1}^n D_n^* + n^{-\frac{2\beta}{2\beta+1}} \sigma^2 \mathfrak{q}\mathfrak{q}^* + n^{-\frac{2\beta}{2\beta+1}} \gamma^2 \mathfrak{b}\mathfrak{b}^*. \end{aligned}$$

Similar to $(\widetilde{M}_s^n,\ P_s^n)$ (see previous section), let us introduce Q_s^n:

$$\begin{aligned} Q_s^n = Q_{s_{i-1}}^n + \int_{s_{i-1}}^s &\Big(\big(a - \mathfrak{q}A\big) Q_{s_{i-1}}^n + Q_{s_{i-1}}^n \big(a - \mathfrak{q}A\big)^* \\ &+ n^{-\frac{\beta}{2\beta+1}} \big(a - \mathfrak{q}A\big) Q_{s_{i-1}}^n \big(a - \mathfrak{q}A\big)^* + \sigma^2 \mathfrak{q}\mathfrak{q}^* + \gamma^2 \mathfrak{b}\mathfrak{b}^*\Big) ds'. \end{aligned}$$

Applying the Arzela-Ascoli theorem technique it can be readily shown that Q_s^n converges in the local uniform topology to Q_s, where

$$Q_s = Q_0 + \int_0^s \Big(\big(a - \mathfrak{q}A\big) Q_{s'} + Q_{s'} \big(a - \mathfrak{q}A\big)^* + \sigma^2 \mathfrak{q}\mathfrak{q}^* + \gamma^2 \mathfrak{b}\mathfrak{b}^*\Big) ds,$$

and $\lim_{s\to\infty} Q_s := Q$ with Q being the unique solution of Lyapunov equation

$$\big(a - \mathfrak{q}A\big) Q + Q \big(a - \mathfrak{q}A\big)^* + \sigma^2 \mathfrak{q}\mathfrak{q}^* + \gamma^2 \mathfrak{b}\mathfrak{b}^* = 0. \tag{4.3}$$

The matrix Q is a function of arguments $\mathfrak{q}$ and γ: $Q = Q(\mathfrak{q}, \gamma)$. We choose $\mathfrak{q} = \mathfrak{q}(\gamma)$ so that for any γ

$$Q(\mathfrak{q}, \gamma) \geq Q(\mathfrak{q}(\gamma), \gamma) := Q(\gamma) > 0. \tag{4.4}$$

Due to the Kalman filtering theory, the lower bound (4.4) holds true for

$$\mathfrak{q}(\gamma) = \frac{Q(\gamma) A^*}{\sigma^2} \tag{4.5}$$

with $Q(\gamma)$ being solution of the algebraic Riccati equation

$$aQ(\gamma) + Q(\gamma) a^* + \gamma^2 \mathfrak{b}\mathfrak{b}^* - \frac{Q(\gamma) A^* A Q(\gamma)}{\sigma^2} = 0. \tag{4.6}$$

It is well known (see e.g. Theorem 16.2 in [7]) that (4.6) possesses a unique positive-definite solution provided that block-matrices

$$G_1 = \begin{pmatrix} A \\ Aa \\ \vdots \\ Aa^k \end{pmatrix} \quad \text{and} \quad G_2 = \begin{pmatrix} \mathfrak{b}\mathfrak{b}^* & a\mathfrak{b}\mathfrak{b}^* & \dots & a^k \mathfrak{b}\mathfrak{b}^* \end{pmatrix}$$

have full ranks $r = k + 1$. Notice that G_1 is a unite matrix and the rank of G_2 is $k + 1$. Consequently, the eigenvalues of the matrix $(a - \mathfrak{q}(\gamma)A)$ with $\mathfrak{q}(\gamma)$ defined in (4.5) have negative real parts (see, Lemma 16.11 in [7]).

4.3. **Minimization of the cost function.** The one parameter family

$$\Gamma = \Big\{\gamma \ge \gamma_\varepsilon > 0 : \mathfrak{q}(\gamma) = \frac{Q(\gamma)A^*}{\sigma^2}\Big\}$$

permits a simple numeric implementation and guarantees filtering stability mentioned above. In this class we use a constrain parameter γ_ε to compensate unacceptably large boundary layer when the minimization procedure yields small values of $\gamma^\circ = \operatorname{argmin}_{\gamma>0} C\big(\mathfrak{q}(\gamma)\big)$, with $C\big(\mathfrak{q}(\gamma)\big)$ given in (3.11). The magnitude of γ_ε is dictated by k, σ, initial conditions and boundary layer specifications. The minimization in our class provides

$$\gamma^\circ = \operatorname*{argmin}_{\gamma\ge\gamma_\varepsilon} C\big(\mathfrak{q}(\gamma)\big) \quad \text{and} \quad \mathfrak{q}(\gamma^\circ) = \frac{Q(\gamma^\circ)A^*}{\sigma^2}. \tag{4.7}$$

5. Explicit minimization procedure

5.1. **Filter gain.** In this section we describe a structure of $\mathfrak{q}(\gamma^\circ)$. Recall that $\mathfrak{q}(\gamma) = \frac{Q(\gamma)A^*}{\sigma^2}$ and $Q(\gamma)$ solves the Riccati equation (4.6) for any fixed σ. For notational convenience replace $Q(\gamma)$ by $Q(\gamma,\sigma)$ and set $U = Q(1,1)$. Clearly, U solves the algebraic Riccati equation

$$aU + Ua^* + \mathfrak{b}\mathfrak{b}^* - UA^*AU = 0.$$

Kalachev [5] shows that

$$Q_{ij}(\gamma,\sigma) = U_{ij}\sigma^2\Big(\frac{\gamma}{\sigma}\Big)^{\frac{i+j+1}{k+1}},\ i,j = 0,1,\dots,k,$$

where $Q_{ij}(\gamma,\sigma)$ and U_{ij} are entries of $Q(\gamma,\sigma)$ and U respectively. Hence,

$$\begin{aligned} q_0(\gamma) &= U_{00}\Big(\frac{\gamma}{\sigma}\Big)^{1/k+1} \\ q_1(\gamma) &= U_{01}\Big(\frac{\gamma}{\sigma}\Big)^{2/k+1} \\ &\dots\dots\dots\dots\dots\dots \\ q_k(\gamma) &= U_{0k}\Big(\frac{\gamma}{\sigma}\Big). \end{aligned}$$

For $k \le 4$, these values are given in the table below.

k	U_{00}	U_{01}	U_{02}	U_{03}	U_{04}
0	1	NA	NA	NA	NA
1	$\sqrt{2}$	1	NA	NA	NA
2	2	2	1	NA	NA
3	$\sqrt{4+\sqrt{8}}$	$2+\sqrt{2}$	$\sqrt{4+\sqrt{8}}$	1	NA
4	$1+\sqrt{5}$	$3+\sqrt{5}$	$3+\sqrt{5}$	$1+\sqrt{5}$	1

(Table 1)

The complex structure of $C\big(\mathfrak{q}(\gamma)\big)$ does not provide an insight of γ and L connection. Numerical simulations show that for a wide range of values $\log(\gamma^\circ)$ is almost proportional to $\log(L)$ (see also Figure 2). This remark enables to construct a simple interpolation tables for the values of γ° and $C\big(\mathfrak{q}(\gamma)\big)$ with respect to the parameter L.

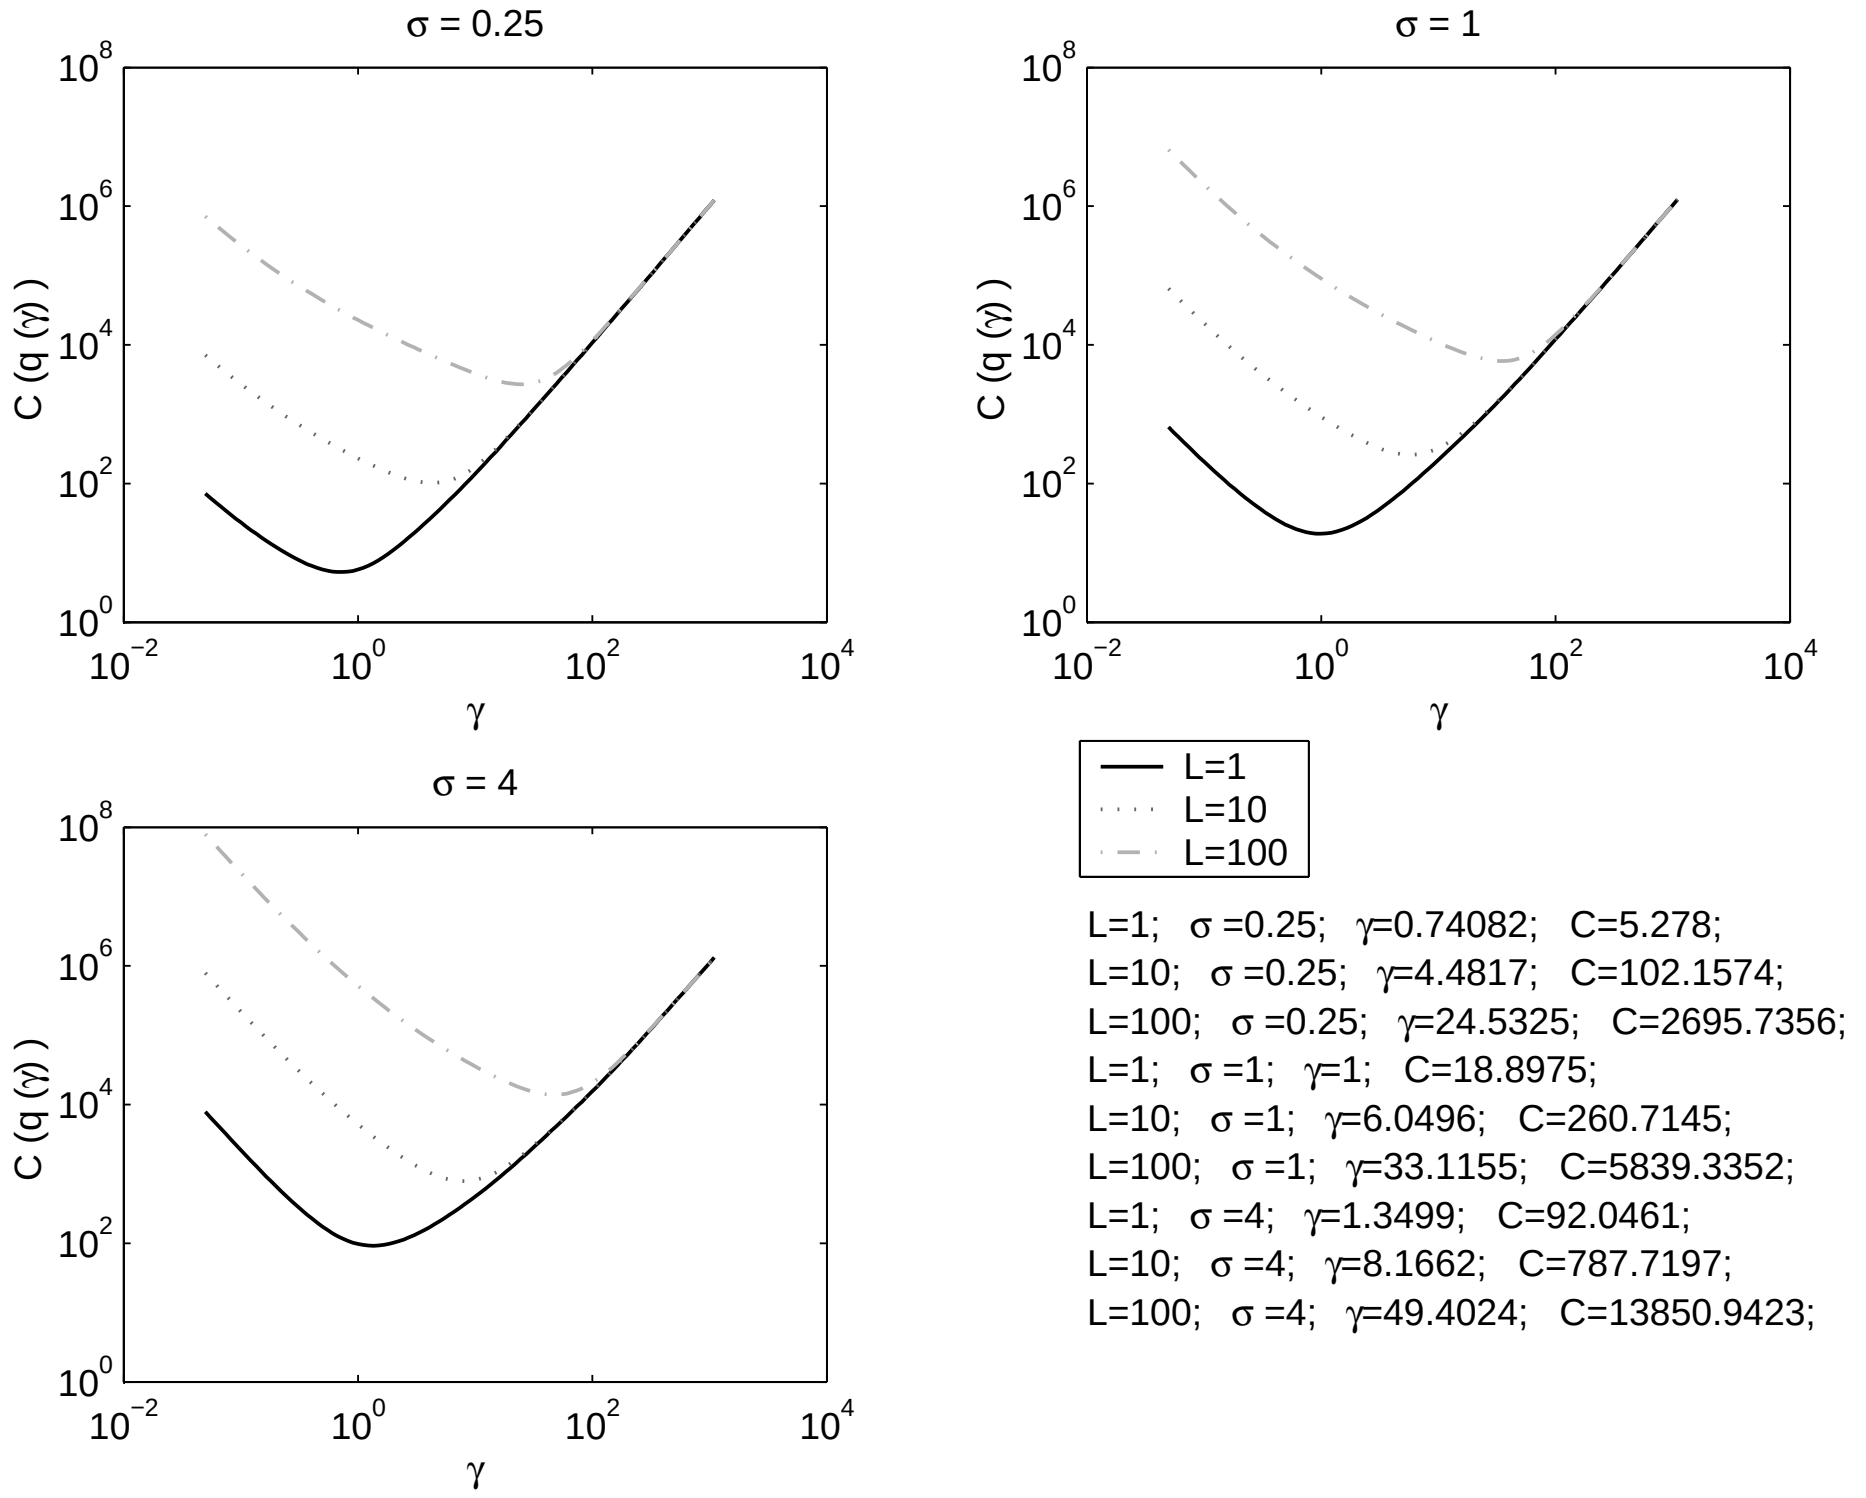

L=1; σ =0.25; γ=0.74082; C=5.278;
L=10; σ =0.25; γ=4.4817; C=102.1574;
L=100; σ =0.25; γ=24.5325; C=2695.7356;
L=1; σ =1; γ=1; C=18.8975;
L=10; σ =1; γ=6.0496; C=260.7145;
L=100; σ =1; γ=33.1155; C=5839.3352;
L=1; σ =4; γ=1.3499; C=92.0461;
L=10; σ =4; γ=8.1662; C=787.7197;
L=100; σ =4; γ=49.4024; C=13850.9423;

FIGURE 2. Cost function $C\big(\mathfrak{q}(\gamma)\big)$ in logarithmic scale for various L and σ; $k = 2$.

5.2. **Eigenvalues of $(\boldsymbol{a} - \mathfrak{q}(\gamma)\boldsymbol{A})$.** Although the eigenvalues of $\mathfrak{q}(\gamma)$ have negative real parts, we may not formally guarantee that they are different. So, for $k \le 4$ we give the eigenvalues:

$$\begin{aligned}
k = 0: &\quad -\Big(\frac{\gamma}{\sigma}\Big)\\
k = 1: &\quad -\Big(\frac{\gamma}{\sigma}\Big)^{1/2}\Big(\frac{1}{\sqrt{2}} \pm i\frac{1}{\sqrt{2}}\Big)\\
k = 2: &\quad -\Big(\frac{\gamma}{\sigma}\Big)^{1/3}\Big(1;\ \frac{1}{2} \pm i\frac{\sqrt{3}}{2}\Big)\\
k = 3: &\quad -\Big(\frac{\gamma}{\sigma}\Big)^{1/4}\Big(0.924 \pm i0.383;\ 0.383 \pm i0.924\Big)\\
k = 4: &\quad -\Big(\frac{\gamma}{\sigma}\Big)^{1/5}\Big(1;\ 0.809 \pm i0.588;\ 0.309 \pm i0.951\Big).
\end{aligned}$$

For $k > 4$, the fact that the polynomial has different roots should be verified.

Notice that $(\gamma/\sigma)^{1/(k+1)}$ is a natural control parameter defining the size of boundary layer and should be limited from below by $(\gamma_\varepsilon/\sigma)^{1/(k+1)}$ with appropriate γ_ε.

5.3. **Cost function.** The index form of $\big(a-\mathfrak{q}A\big)\widetilde{M}(\mathfrak{q}) = -L\mathfrak{b}$ i.e.

$$\begin{pmatrix} -q_0 & 1 & 0 & 0 & \cdots & 0 \\ -q_1 & 0 & 1 & 0 & \cdots & 0 \\ \vdots & \vdots & \vdots & \vdots & \dots & \vdots \\ -q_{k-1} & 0 & 0 & 0 & \cdots & 1 \\ -q_k & 0 & 0 & 0 & \cdots & 0 \end{pmatrix} \begin{pmatrix} \widetilde{M}_0(\mathfrak{q}) \\ \widetilde{M}_1(\mathfrak{q}) \\ \vdots \\ \widetilde{M}_{k-1}(\mathfrak{q}) \\ \widetilde{M}_k(\mathfrak{q}) \end{pmatrix} = -L \begin{pmatrix} 0 \\ 0 \\ \vdots \\ 0 \\ 1 \end{pmatrix}$$

allows to find the solution

$$\widetilde{M}_0(\mathfrak{q}) = L\frac{1}{q_k}, \widetilde{M}_1(\mathfrak{q}) = L\frac{q_0}{q_k}, \dots, \widetilde{M}_k(\mathfrak{q}) = L\frac{q_{k-1}}{q_k}.$$

Thus, trace $\Big(\widetilde{M}(\mathfrak{q})\widetilde{M}^*(\mathfrak{q})\Big) = L^2\Big[\Big(\frac{1}{q_k}\Big)^2 + \sum_{j=0}^{k-1}\Big(\frac{q_j}{q_k}\Big)^2\Big]$. From (3.9) it follows $P(\mathfrak{q}) = \sigma^2\int_0^\infty \mathfrak{q}^* e^{(a-\mathfrak{q}A)^* t} e^{(a-\mathfrak{q}A)t}\mathfrak{q}dt$.

As a result, the final expression for the cost function is

$$C\big(\mathfrak{q}\big) = \sigma^2\Bigg(\int_0^\infty \mathfrak{q}^* e^{(a-\mathfrak{q}A)^* t} e^{(a-\mathfrak{q}A)t}\mathfrak{q}dt + \Big(\frac{L}{\sigma}\Big)^2\Big[\Big(\frac{1}{q_k}\Big)^2 + \sum_{j=0}^{k-1}\Big(\frac{q_j}{q_k}\Big)^2\Big]\Bigg).$$

6. Conclusion remark

In this paper, we use the fact that a class of Kalman filters, being adapted to a nonparametric statistic setting, provides the optimal rate of convergence in sample size ($n \to \infty$). We show how to evaluate a normalized risk function for large sample size and minimize that value in some subclass of Kalman filters with constant filter gain. The Kalman type estimator, as any on-line estimator, has inevitable boundary layer. We suggest to reduce the boundary layer by interpolation procedure and limitation from below for filtering gain.

References

[1] Bar-Shalom, Yaakov and Li, Xiao-Rong *Estimation and tracking. Principles, techniques, and software.* Artech House, Inc., Boston, MA, 1993.

[2] Chow, P.-L., Khasminskii, R. and Liptser, R.Sh. (1997) Tracking of signal and its derivatives in Gaussian white noise, *Stochastic processes and their application.* **69**, 2 pp. 259-273.

[3] Ibragimov, I. and Khasminskii, R. (1980) On nonparametric estimation of regression,*Soviet Math.Dokl.*,**21**, pp. 810–814.

[4] Ibragimov, I. and Khasminskii, R. *Statistical estimation: Asymptotic theory.* Springer Verlag, 1981 (Russian ed.1979).

[5] M.G. Kalachev "One method of multiple differentiation applied to a signal in automatic regulation systems". *Automation and Remote Control*, No 6, 1970, pp. 890–896.

[6] Khasminskii, R and Liptser, R. (2001) On-line estimation of a smooth regression function

[7] R.Sh. Liptser and A.N. Shiryayev *Statistics of Random Processes, II.* Springer Verlag. 2000

[8] Parzen, E. (1962) On estimation of a probability density function and mode. *Ann. Math. Statist.*, **33**, No 3, pp. 1065–1073.

[9] Rosenblatt, M. (1956) Remarks on some nonparametric estimates of a density function". *Ann. Math. Statist.*, **27**, No 3, pp. 832–837.

[10] Stone, C. (1980) Optimal rates of convergence for nonparametric estimators, *Ann. Statist.*, **8**, pp.1348–1360.
[11] Stone, C. (1982) Optimal global rates of convergence for nonparametric regression, *Ann. Statist.*, **10**, pp.1040–1053.

Electrical Engineering Systems, Tel Aviv University, 69978 - Ramat Aviv, Tel Aviv, Israel
E-mail address: `goldlev@eng.tau.ac.il`

Electrical Engineering Systems, Tel Aviv University, 69978 - Ramat Aviv, Tel Aviv, Israel
E-mail address: `liptser@eng.tau.ac.il`